

GENERAL INSTALLATION MANUAL FOR SMU TYPE METAL DOORS AND SMU HATCH

1. INSTALLATION

Before installing, pay attention to the following:

- The door frame of the SMU type metal door and SMU hatch (hereinafter referred to as „opening filler“) must be fastened tightly and firmly into a completed structural opening and onto a completed floor. The thickness of the later flooring material should also be taken into account. The most suitable installation time is after casting the floor and, if the side cheeks are finished without covering strips, before any possible finishing work on the wall. When using cover strips, it is advisable to install the door after the final finishing of the structural opening, incl. painting.
- Suitable materials for isolating gaps between the door frame of the opening filler and the wall for doors with fire resistance class are shown in Table 1**, for opening fillers without a fire resistance class, insulation foam can be freely chosen according to the conditions of the environment.
- The door frame must be fixed with a screw fastening, suitable for the wall type. It is permitted to use wedge anchor bolts, screws or bolts with metal or plastic dowels or other fasteners, the minimum dimensions are shown in **Table 1**

	SMU 101/201 102/202	SMU 101/201 102/202 EI30/EI60	SMU 103	SMU 103 EI60	SMU 110/210	SMU 110/210 EI120	SMU 106/107/ 206/207
Isolation materials for the gaps between the door frame and the wall							
Vill Paroc eXtra*	x	x	x	x	x	x	x
Soudal Soudafoam FR *	x	x	x		x		x
Penosil Premium Gunfoam Fire Rated*	x	x	x	x	x		x
Penosil Premium Gunfoam Fire Rated**	x	x	x	x	x	x	x
Isolation foam for opening fillers without a fire class	x		x		x		x
Minimum required dimensions for the fasteners							
Screw for concrete Ø7,5x82	x	x	x	x	x	x	x
Screw for concrete Ø7,2x42 (for fastening the threshold)	x	x			x	x	x
Screw for a Fibro block Ø 8x90mm	x	x	x	x	x	x	x
Self-drilling screw for a metal frame Ø 6,3x55	x	x	x	x	x		x
Screws or bolts Ø 5x60mm	x		x	x	x		x
Screws or bolts Ø 5x60mm	x	x	x	x	x		x
Metal or plastic dowel Ø8x50mm	x	x		x	x		x

*Installation gap up to 30mm


**Installation gap up to 17mm

Table 1 Fasteners for the door frame and isolation materials for the gaps between the frame of the opening filler and the wall.


STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

Work sequence:

- 1) When transporting the opening filler to the aperture, avoid damaging the surface finish and, if necessary, protect the surfaces with cardboard, plastic foil or some other material.
- 2) Check the compatibility of the structural opening and the dimensions of the door.

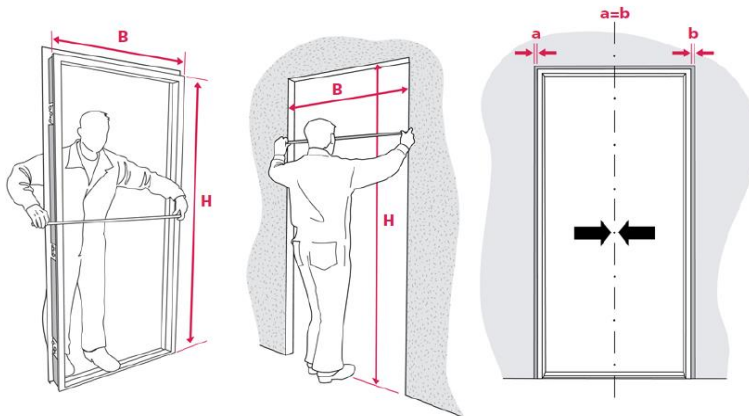

- 3) Place the door frame into the structural opening on the completed and level floor.
NB! In case of an opening filler without a threshold, make sure that you remove the installation support from the door frame and later from the sub-frame before installation!

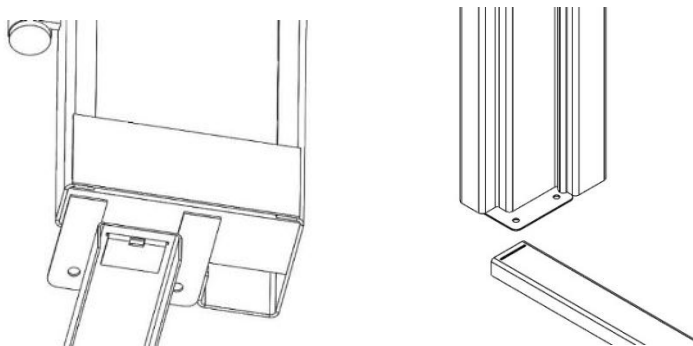

- 4) Bend the fixing elements of the frame according to the building practice.
- 5) The thresholds of opening fillers, which are filled with wool, must be fitted with fire resistance class insulation foam – for opening fillers with a fire resistance class is shown in **Table 1**, and for opening fillers without a fire resistance class, the isolation foam can be chosen freely according to the conditions of the environment.
- 6) NB! If necessary, fix the hinge-side lower corner with a wedge (in the case of a fire restraining product use a wedge, made of non-combustible material).




- 7) Place the door frame in the center of the structural opening, while checking with a spirit level that it is fixed correctly, both vertically and horizontally. If necessary, the frame should be wedged into the wall opening.

STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

NB! Avoid deforming the door frame! Make sure the internal diagonals of the door frame are equal!

- 8) When the door frame of the opening filler is too large to be transported to the place of installation, a so-called lego door frame is utilized – for the assembling instructions, see Appendix 1.

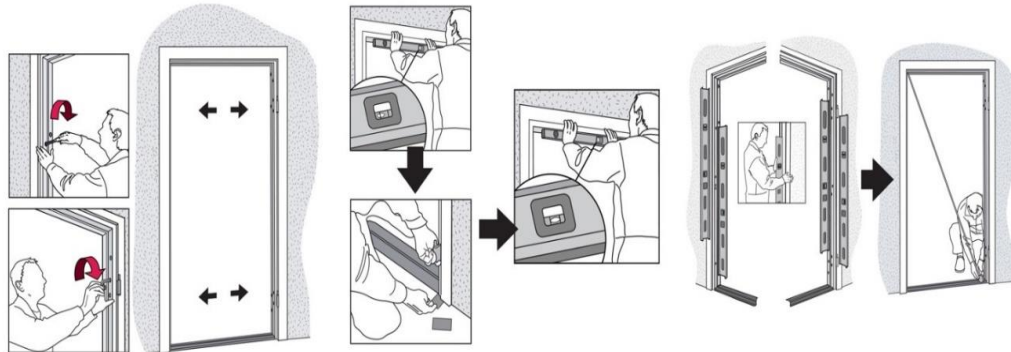

- 9) If the floor is not level, install spacing boards of non-combustible material under the threshold of the fire-resistant opening filler; for opening fillers without a fire resistance class, the spacing boards can be made from freely chosen material.
- 10) Fix the fasteners 1, 2 and 3 (see Figures 1, 2, 3 and 4) so that the threshold (if there is one) and the hinge-side door post are level. See Figure 11.

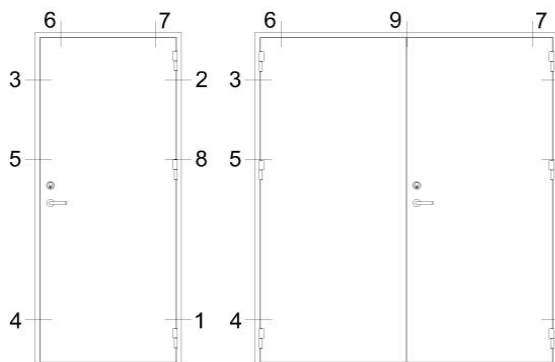


Figure 1 – Layout of fasteners SMU101/201

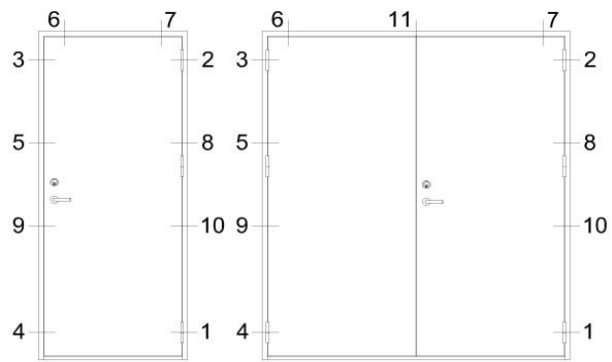
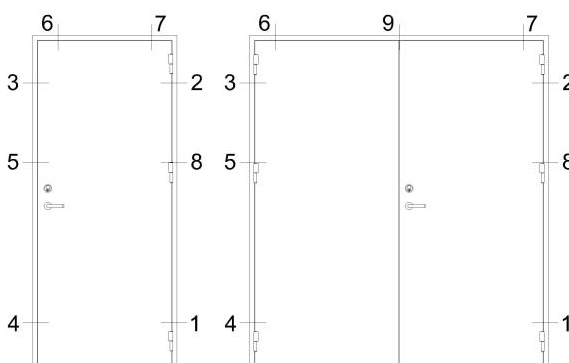


Figure 2 – Layout of fasteners SMU102/202



**Figure 3 – Layout of fasteners SMU110/210
SMU106/206
SMU107/207**

Doubled according to Figure 6

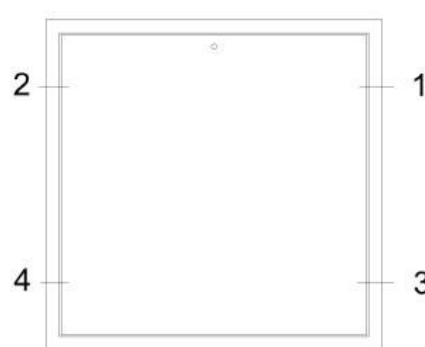


Figure 4 – Layout of fasteners SMU103

STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

- 11) In the case of a double door, install the active door leaf into the frame and check the evenness of the gaps between the door leaf and frame at the top and bottom of the door leaf on the hinge and lock side. See Figure 5. If necessary, adjust the door!

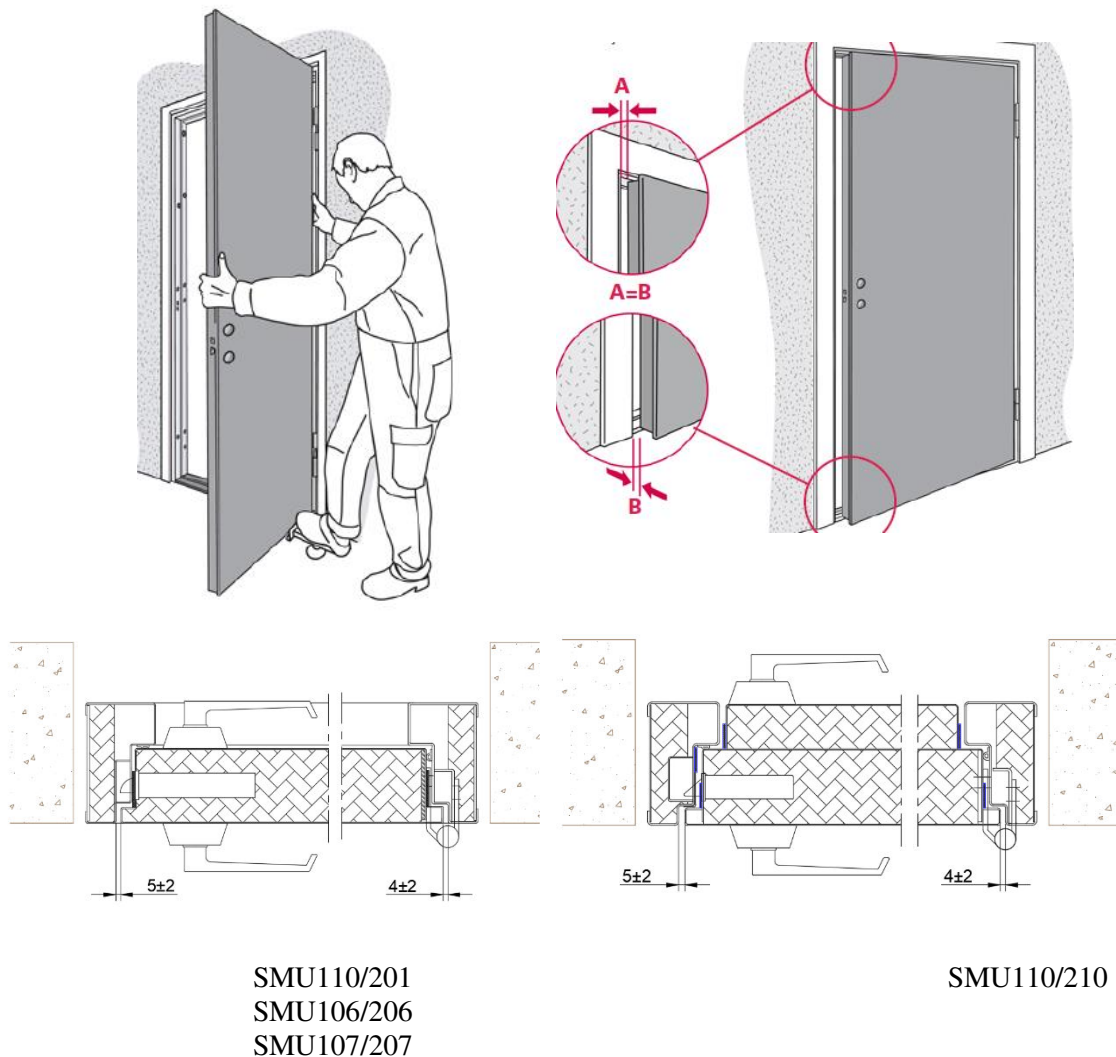



Figure 5 – Tolerances of the gaps between the door leaf and the frame

- 12) Fix the fastener 4 (See Figures 1; 2; 3 and 4).
13) In the case of a double door, install a passive door leaf into the frame and, if necessary, check the performance of the bolt(s)/hardware and adjust them, if necessary



STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

- 14) Fix the other frame fasteners (**the number of fastener holes depends on the door type and dimensions**).
- 15) Fasten the threshold, *making sure that the gaps between the door leaf and the threshold or on doors without threshold the gaps between door leaf and the floor comply with the requirements of Figure MT15008 (Appendix 4). For fastening screws, see Table 1!*

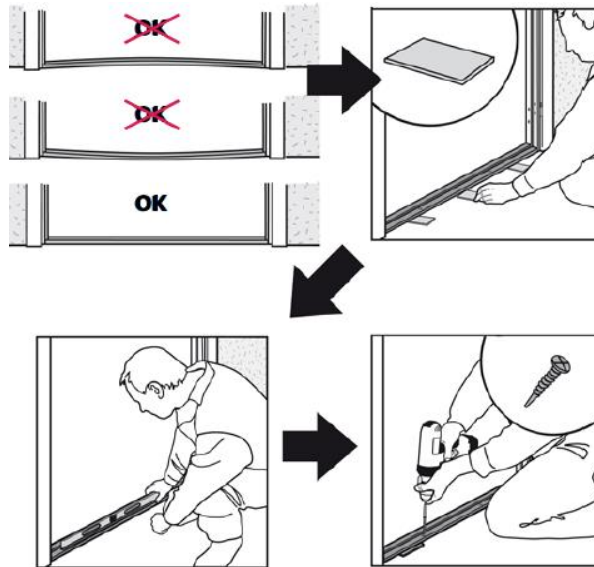

- 16) Fill the gap between the frame and the wall according to **Table 1** and the descriptions in Figures 6, 7, 8 and 9.



STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

TAMMER OÜ
Väike-Paala 4
11415 Tallinn, Estonia
Reg. no. 10394201

Phone +372 614 5500
info@tammer.ee
www.tammer.ee

Swedbank AS
EE 372200221007143338
VAT no EE 100364992

- 17) Install the countersunk head caps of the fastener holes (unless required otherwise) and if there are cover strips, fasten them as shown in Figure 6.

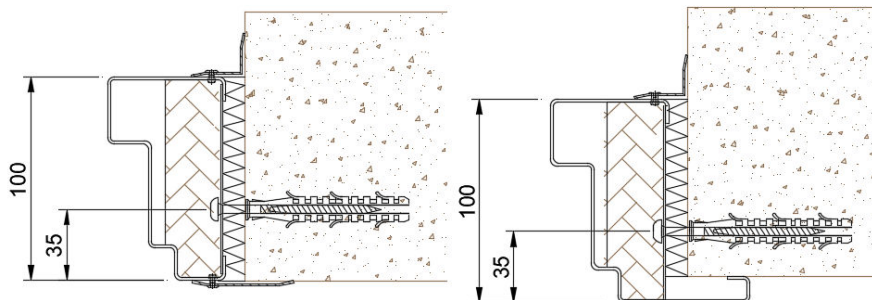


Figure 6 – Installation of the door into the structural opening SMU101/201; SMU102/202

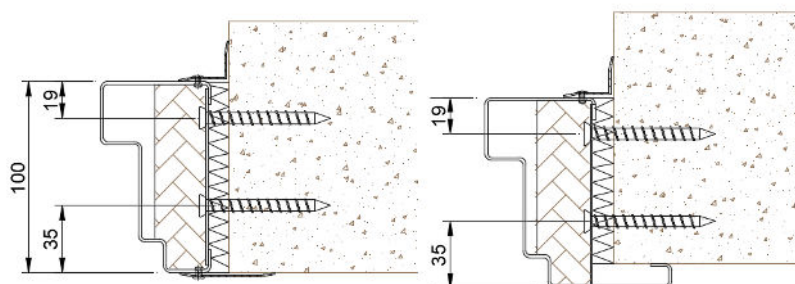


Figure 7 – Installation of the door into the structural opening SMU110/210; SMU106/206; SMU107/207

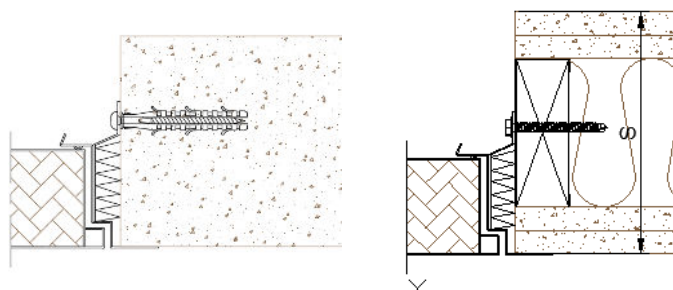


Figure 8 – Installation of the hatch into the structural opening SMU103

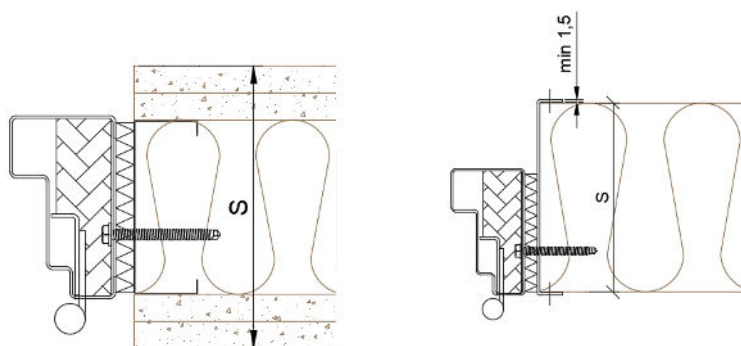


Figure 9 – Installation of the door into a lightweight wall

STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

TAMMER OÜ
Väike-Paala 4
11415 Tallinn, Estonia
Reg. no. 10394201

Phone +372 614 5500
info@tammer.ee
www.tammer.ee

Swedbank AS
EE 372200221007143338
VAT no EE 100364992

NB! Pay attention to the installation depth of the opening filler! If necessary, install a bar to prevent the opening filler from opening too wide.

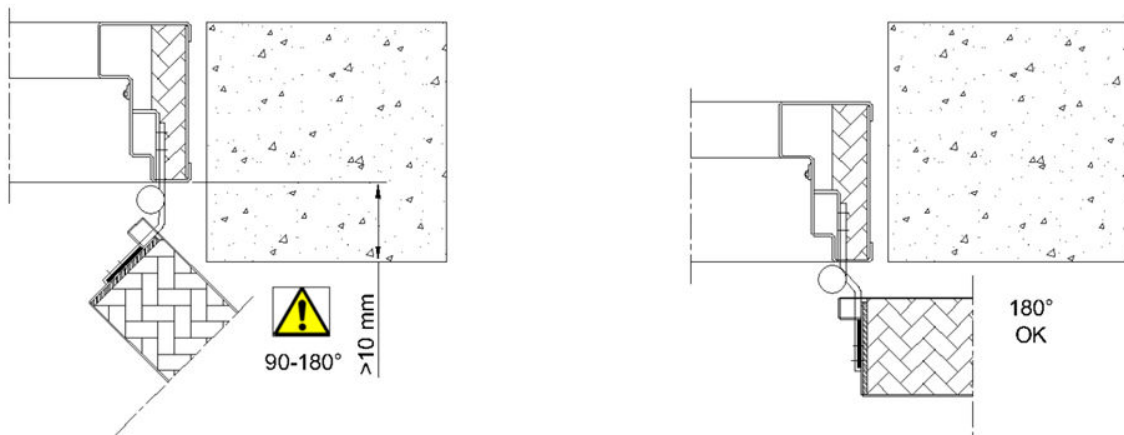


Figure 10– Installation depth

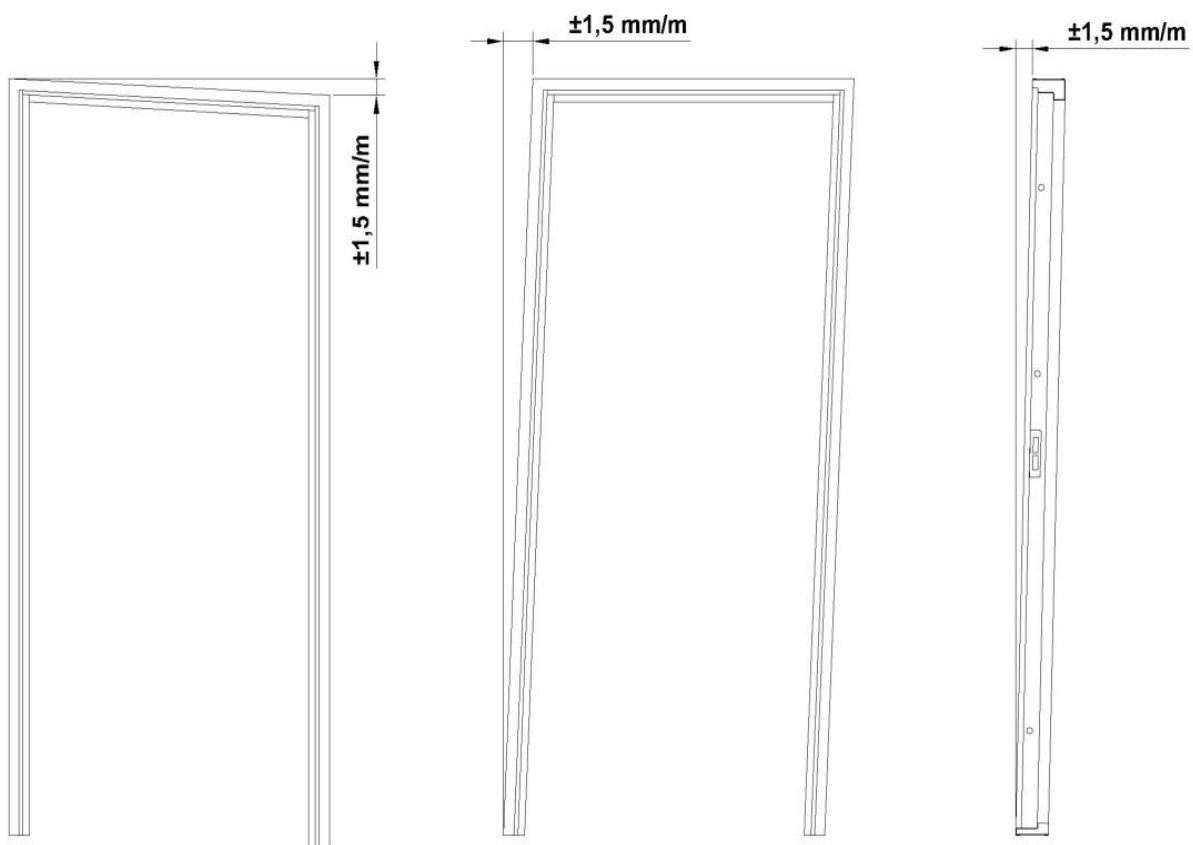


Figure 11 – Door frame installation tolerances

STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

TAMMER OÜ
Väike-Paala 4
11415 Tallinn, Estonia
Reg. no. 10394201

Phone +372 614 5500
info@tammer.ee
www.tammer.ee








Swedbank AS
EE 372200221007143338
VAT no EE 100364992

APPENDIX 1

Lego door frame parts

1) The parts of the “lego” door frame are connected using 4,2x25 mm drilling screws (torx head).

- a) Top frame
- b) Side frame
- c) Drilling screw 4,2x25mm
- d) Lego frame's reinforcing bracket

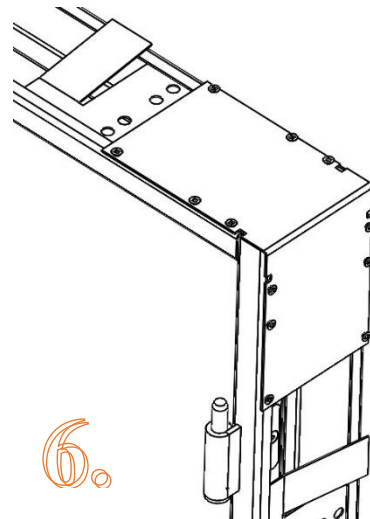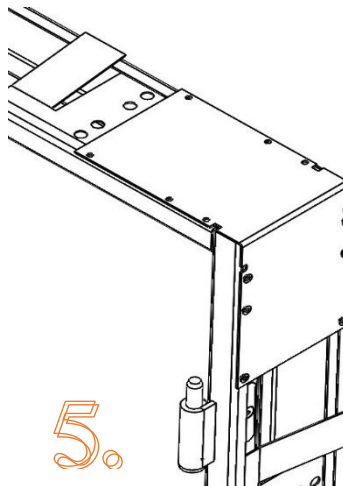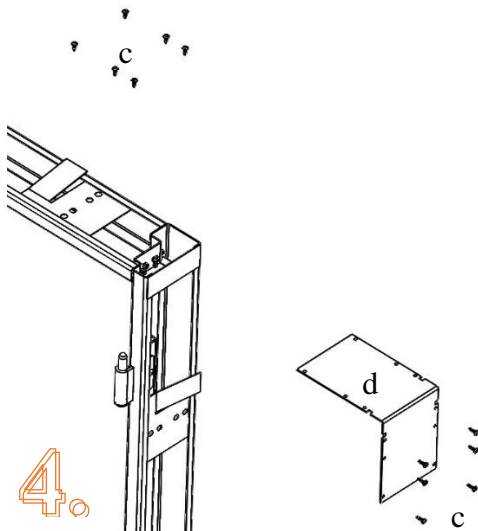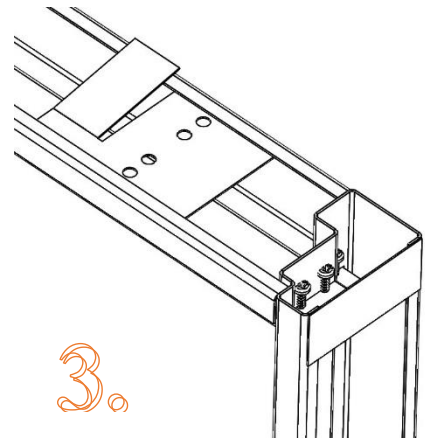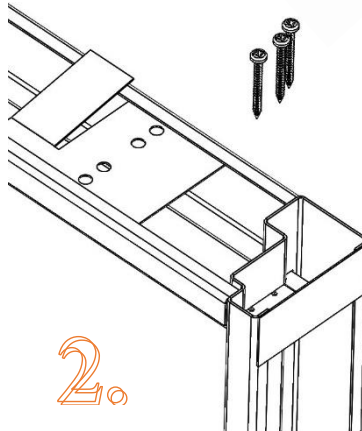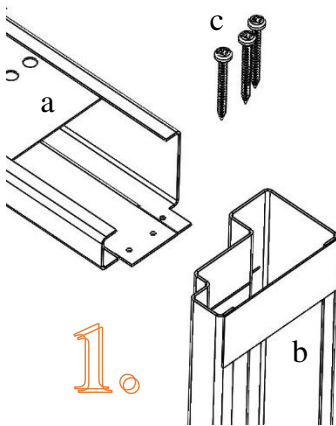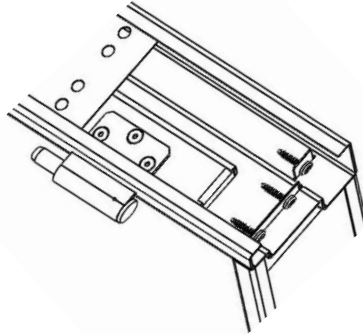

STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

TAMMER OÜ
Väike-Paala 4
11415 Tallinn, Estonia
Reg. no. 10394201


Phone +372 614 5500
info@tammer.ee
www.tammer.ee

Swedbank AS
EE 372200221007143338
VAT no EE 100364992

APPENDIX 2

Sub-frame installation instructions.

- Bend the frame's fastening elements away from the frame 5-10mm
- Install the sub-frame between the frame and bent frame's fastening element
- Fasten with a self-tapping screw

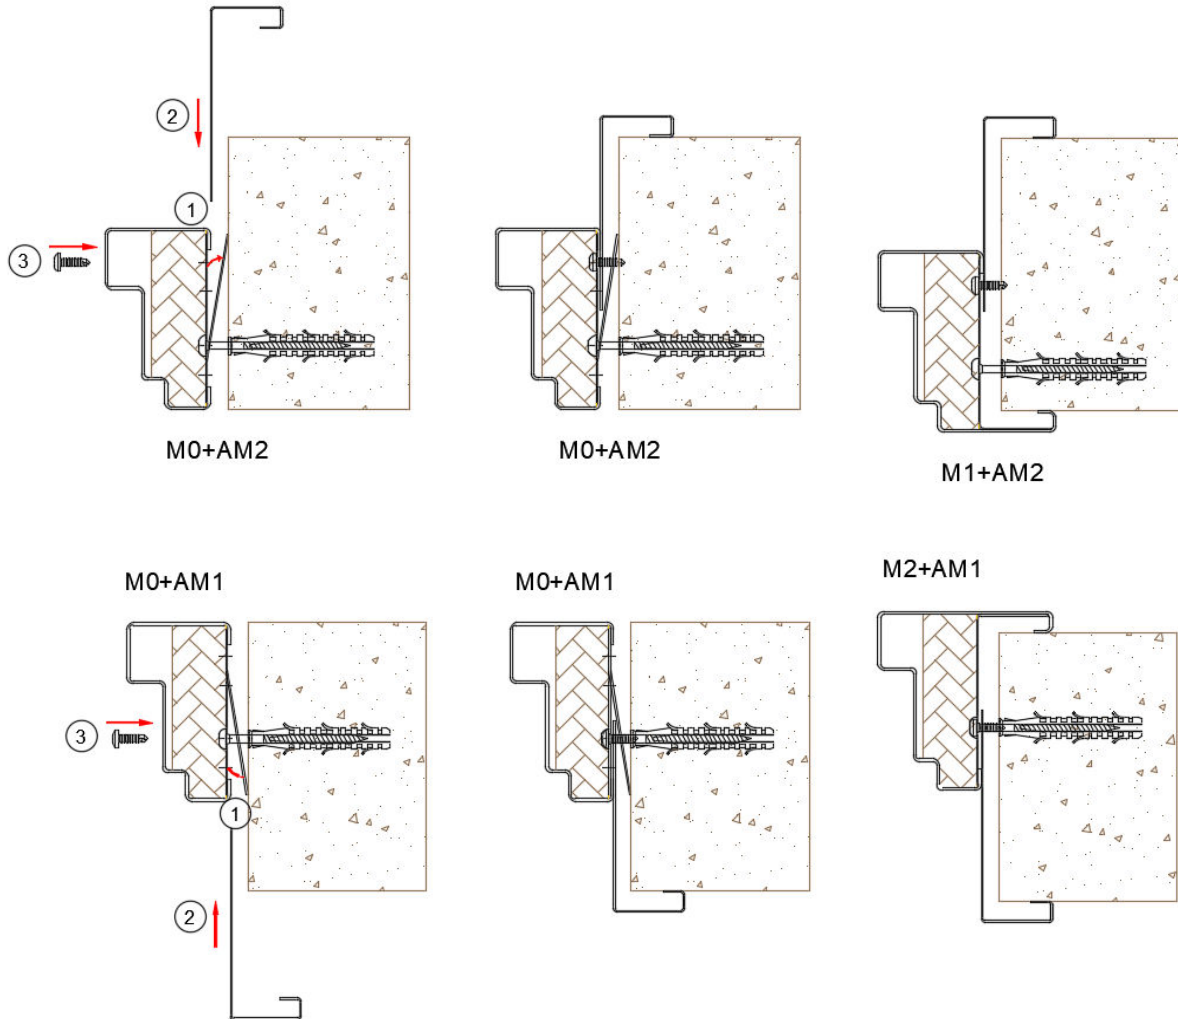

STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

TAMMER OÜ
Väike-Paala 4
11415 Tallinn, Estonia
Reg. no. 10394201

Phone +372 614 5500
info@tammer.ee
www.tammer.ee

Swedbank AS
EE 372200221007143338
VAT no EE 100364992


APPENDIX 3

Water drip bar installation instructions.

Choose an appropriate method for installing the water drip bar (1-3).

When mounting the water drip bar, fasteners must be chosen according to the wall structure. Ø4.2 mm self-drilling screws or rustproof Ø3,2x10 mm rivets should preferably be used.

After installation, the top side of the water drip bar must be siliconized.

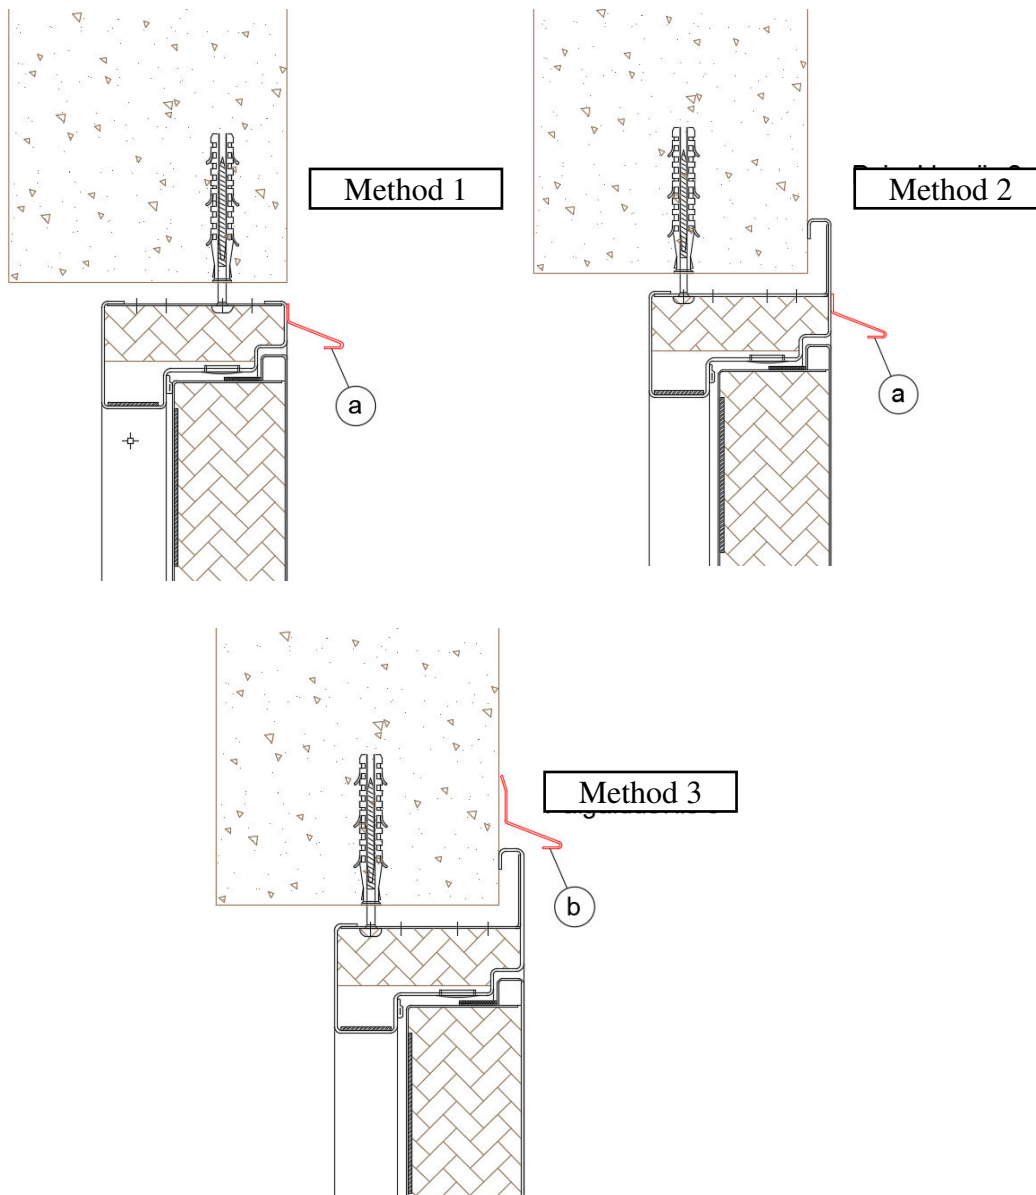

































**STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS**

TAMMER OÜ
Väike-Paala 4
11415 Tallinn, Estonia
Reg. no. 10394201

Phone +372 614 5500
info@tammer.ee
www.tammer.ee

Swedbank AS
EE 372200221007143338
VAT no EE 100364992


APPENDIX 4

Sill types for flush metal doors					
SMU101/201/102/202	SMU110/210	SMU101/201/102/202	SMU110/210	SMU101/201/102/202	SMU110/210
<p>① *Type P20/35</p> 		<p>⑨ Type P5/20T</p> 		<p>⑮ Type PM0</p> 	
<p>② *Type P11/25</p> 		<p>⑩ **Type P20/35VK</p> 		<p>⑯ ****Type PM1</p> 	
<p>③ *Type P5/20</p> 		<p>⑪ **Type P11/25VK</p> 		<p>⑰ *****Type PM2</p> 	
<p>④ Type P5</p> 		<p>⑫ Type P25/40</p> 			
<p>⑤ Type P0</p> 		<p>⑬ Type P35/50</p> 			
<p>⑥ Type P5/20K</p> 		<p>⑭ Type P45/60</p> 			
<p>⑦ *Type P20/20</p> 					
<p>⑧ Type P0/20</p> 					

* NBI TYPES 1,2,3,6,7,10,11,12,13,14 CAN BE REMOVEABLE
 ** NBI TYPE FOR EXTERNAL DOOR
 **** ONLY FOR FRAME TYPE M1-40
 ***** ONLY FOR FRAME TYPE M2-40

Threshold insulation - Paroc Slab 80

General Tolerance unless otherwise specified:
 Assemblies:
 Linear dim.: ± 1,0 mm
 Gaps: ± 2,0 mm


		Drawing no.: MT15008		Rev.: M
Description: SMU101/102/201/202/110/210, sill types and additional				
Drawn: U.Pihlak	Name:	Signature:	Date: 20.02.2020	Sheet/ Sheets: 1/2
Chk'd: M.Ratassepp			Scale: 1:4	16.02.2021 A3

STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

TAMMER OÜ
 Väike-Paala 4
 11415 Tallinn, Estonia
 Reg. no. 10394201

Phone +372 614 5500
 info@tammer.ee
 www.tammer.ee

Swedbank AS
 EE 372200221007143338
 VAT no EE 100364992

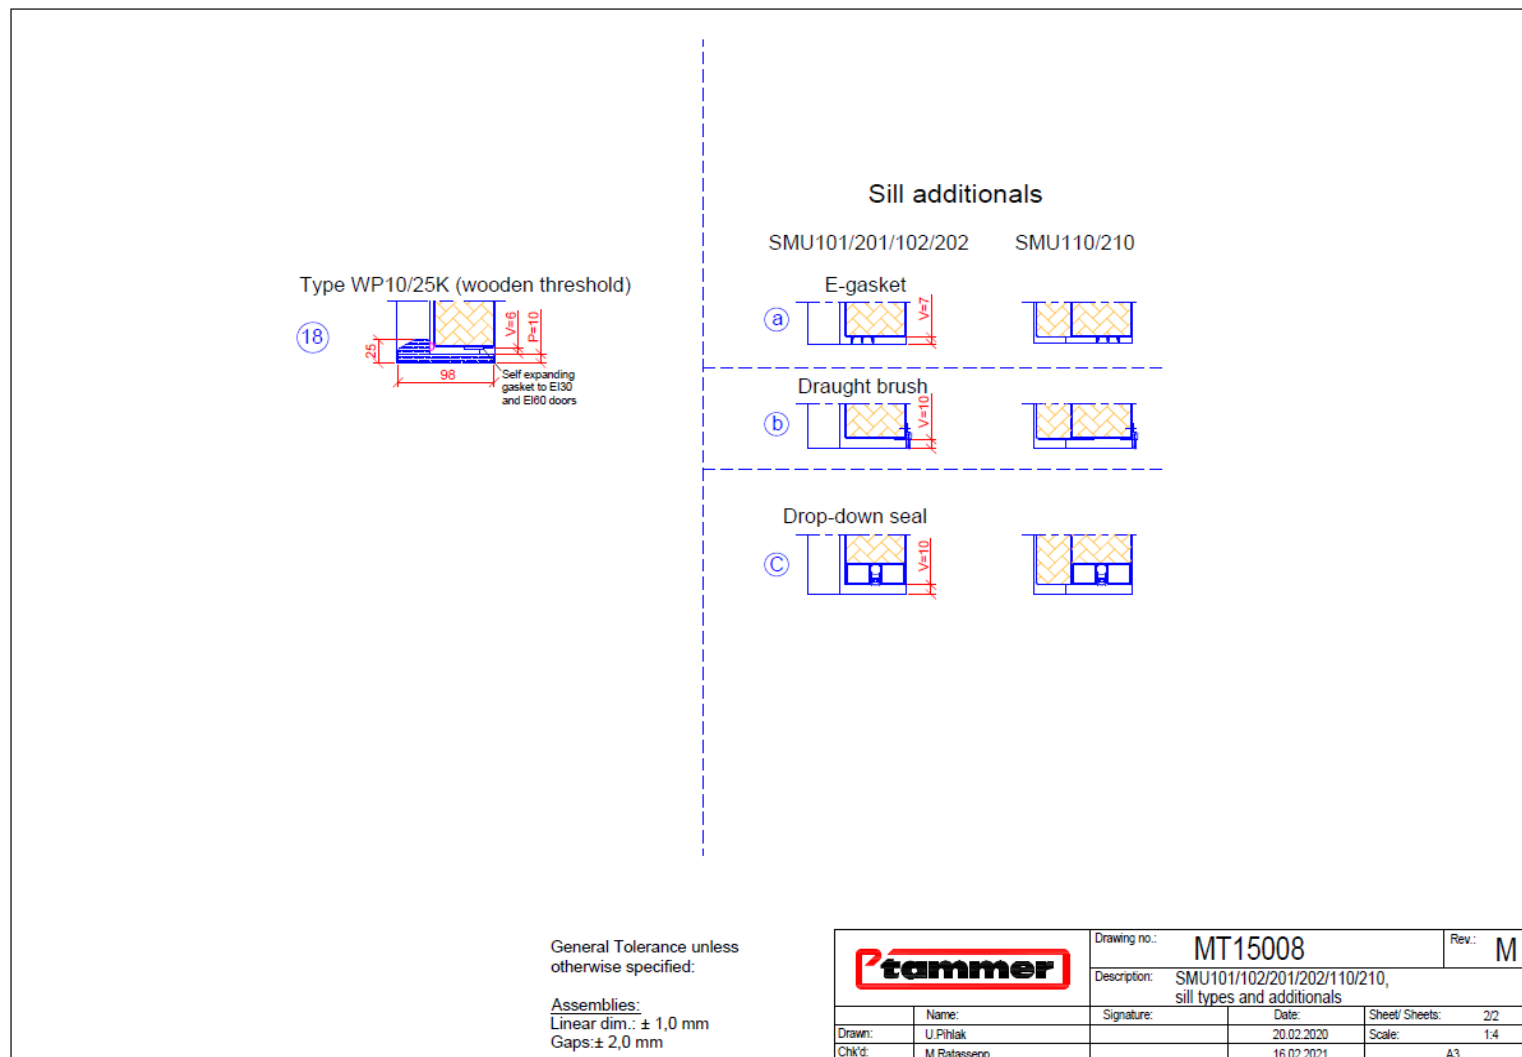

STEEL PROFILE DOORS / METAL DOORS / MARINE DOORS

TAMMER OÜ
 Väike-Paala 4
 11415 Tallinn, Estonia
 Reg. no. 10394201

Phone +372 614 5500
 info@tammer.ee
 www.tammer.ee

Swedbank AS
 EE 372200221007143338
 VAT no EE 100364992