

B-15 Solid Door


MSF101 / MSF201

AREAS OF USE

B-15 hinged doors are suitable for a wide range of internal marine applications where B-15 fire protection is required. Project-specific configurations are available.

PROPERTIES

Fire classification	B-15
Compliance	IMO / SOLAS / MED / USCG
Sound reduction	up to Rw 40 dB
Application	Internal environments
Maximum clear opening (W x H), mm	Single leaf: 1100 x 2100 Double leaf: 2200 x 2100 <i>Maximum dimensions may be increased for specific projects, subject to compliance with IMO MSC.1/Circ.1319.</i>
Total weight	32-55 kg/m ²
Locking and function	Compatible with a wide range of mechanical and electrical locks, including access control integration, as well as door closers, escape hardware, and automatic operators.
Extras	Options include various vision panels, ventilation grilles, threshold options, kickplates, X-ray shielding, and other project-specific features. Available surface finishes include painted steel, stainless steel, PVC-covered steel, decorative laminates, and custom finishes. USPH- and ADA-compliant configurations are available on request.

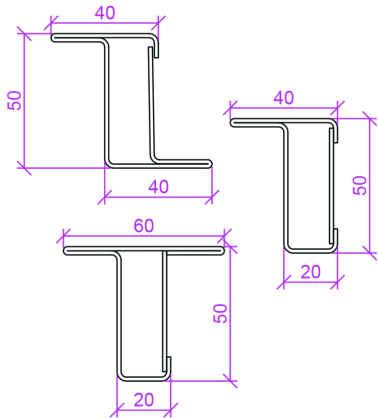

STANDARD ASSEMBLY

Supplied with a door leaf, frame, and counter frame for a 50 mm bulkhead, finished with standard RAL powder coating, and including a standard mechanical lock compatible with DIN or TV key cylinders (cylinder is not included), escutcheons with lever handle, and a door closer.