



B-15 Steel Hatch


MSF103

AREAS OF USE

B-15 hatches are suitable for accommodation, service, technical, and public areas, including corridors, utility spaces, operational areas, and other internal marine environments where B15 fire protection and flush wall integration are required.

PROPERTIES

Fire classification	B-15
Compliance	IMO / SOLAS / MED / USCG
Sound reduction	NPD
Application	Internal environments
Maximum clear opening (W x H), mm	Single leaf: 600 x 2000
Total weight	23 kg/m²
Locking and function	Compatible with a quarter-turn lock and recessed handle.
Extras	Available surface finishes include painted steel, stainless steel, PVC-covered steel, decorative laminates, and custom finishes.

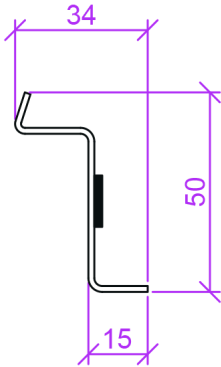

STANDARD ASSEMBLY

Supplied with a hatch leaf and frame, finished with standard RAL powder coating, and including a quarter-turn lock and opening limiter.