

Swing Door


MSF720 / MSF721

AREAS OF USE

C-Class double-action doors are suitable for internal marine areas where hands-free operation, easy access, and smooth traffic flow are required.

PROPERTIES

Fire classification	C
Compliance	IMO / SOLAS / MED / USCG
Sound reduction	NPD
Application	Internal environments
Maximum clear opening (W x H), mm	Single or double leaf Can be manufactured to project-specific dimensions.
Total weight	28 kg/m²
Locking and function	Compatible with mechanical bolt locks or other project specific hardware
Extras	Vision panels come in rectangular, round, and oblong shapes. Options include kickplates and push plates. Surface finishes include painted steel, stainless steel, PVC-covered steel, decorative laminates, and custom finishes. USPH-compliant configurations are available on request.

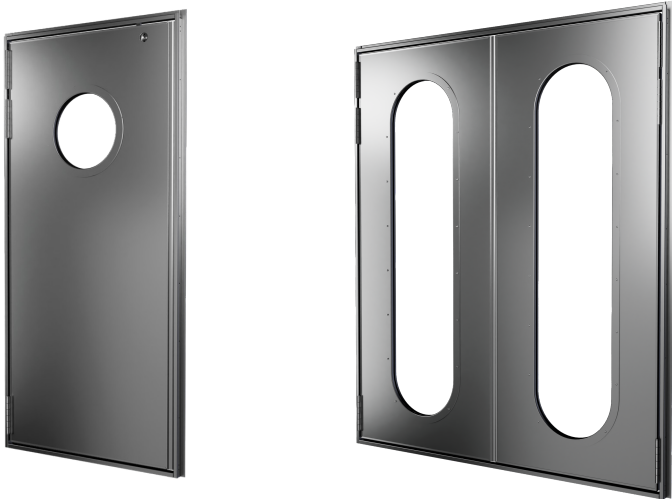

STANDARD ASSEMBLY

Supplied with a door leaf and frame, finished in standard RAL powder coating, including a mechanical bolt lock compatible with DIN or TV key cylinders (cylinder not included) and a cylinder rose.