B-15 Cabin Door

MSF101 CD


AREAS OF USE

B-15 cabin doors are suitable for crew and passenger accommodation areas where B-15 fire protection and high sound insulation are required.

PROPERTIES

Fire classification	B-15
Compliance	IMO / SOLAS / MED / USCG
Sound reduction	up to Rw 45 dB
Application	Internal environments
Maximum clear opening (W x H), mm	Single leaf: 905 x 2050 Maximum dimensions may be increased for specific projects, subject to compliance with IMO MSC.1/Circ.1319.
Total weight	38 kg/m²
Locking and function	Compatible with a range of mechanical and electrical locks, including access control integration, as well as door closers, and automatic operators.
Extras	Options include a door viewer, adjustable hinges, various threshold options, kick-out panel, and replaceable bottom gaskets. Available surface finishes include painted steel, stainless steel, PVC-covered steel, and custom finishes. ADA-compliant configurations are available on request.



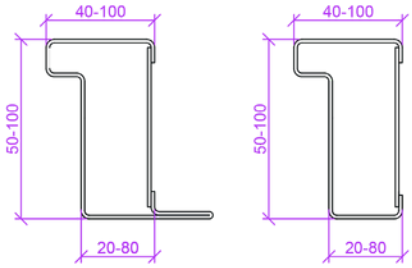

STANDARD ASSEMBLY

Supplied with a door leaf, frame, and counterframe, finished in standard RAL powder coating. Includes the selected card lock with suitable accessories, compatible with a key cylinder (cylinder not included), and a door closer.